


PART NUMBER DESCRIPTION

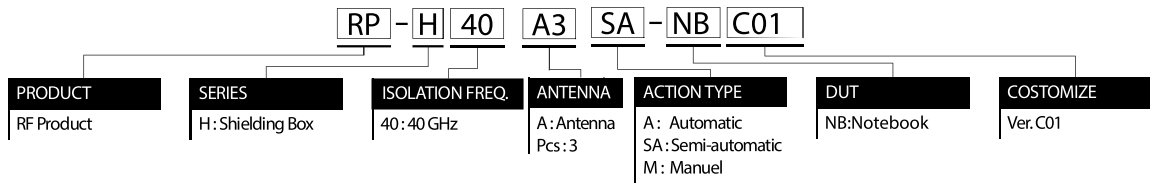

PRODUCT OVERVIEW

Specifically designed for Millimeter wave test
 Pneumatic operation for lid open-close
 Foam absorber in the box
 Reliable High RF Shielding from 18 GHz to 40 GHz
 Customizable data connection
 RS-232 remote operation

Horn Antenna
 Replace DUT Holder
 Basic Data Connector : USB3.0*4, RJ45, AC



Front View





I/O Module

SPECIFICATION

	TEST CONDITION	SPECIFICATION
ISOLATION	18GHz~40GHz	75 dB Min

FEATURE SPECIFICATION

RF Connectors	2.92mm RF Connector
CONTROL I/O	RJ45 x 4, RS232 x 2, USB3.0 x 4 TYPE C x 2
POWER I/O	DC Power Jack 2.1mm x 2
Remote control	RS- 232
OUTER SIDE DIMENSION	1371(W) x 1703(D) x 1725(H)mm
Weight	330kg

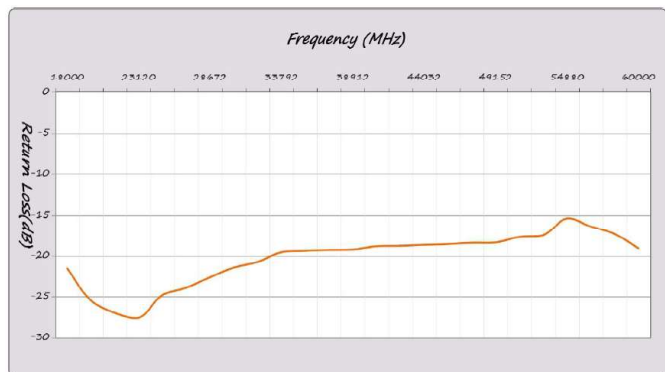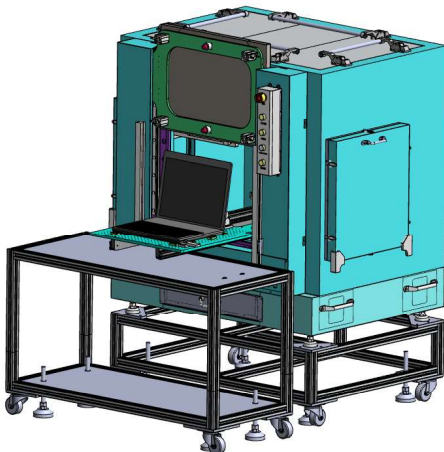

RAPIDTEK
RF PRODUCT