


PART NUMBER DESCRIPTION

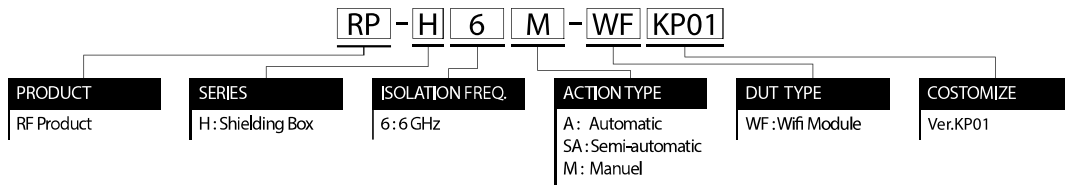

PRODUCT OVERVIEW

Middle size shielding box for RF test including FR1 frequency band. It's useful for WiFi, LTE, etc. Reliable high RF isolation greater than 85dB from 0.7 GHz to 6 GHz. There are special selections such as TypeC, POE, etc..

SPECIFICATION

	TEST CONDITION	SPECIFICATION
ISOLATION	0.9GHz	95 dB Min
	1.8GHz	90 dB Min
	2.4GHz	90 dB Min
	5.8GHz	85 dB Min




Front View



Rear View

FEATURE SPECIFICATION

RF I/O CONNECTORS	N/A
CONTROL I/O	RS232*1
POWER I/O	RJ45*2, USB2.0*2, DC Jack 2.1mm*1
INSIDE DIMENSION	431 (W) x 451 (D) 301 (H) mm
OUTER SIDE DIMENSION	514 (W) x 632 (D) 345 (H) mm
Weight	33kg

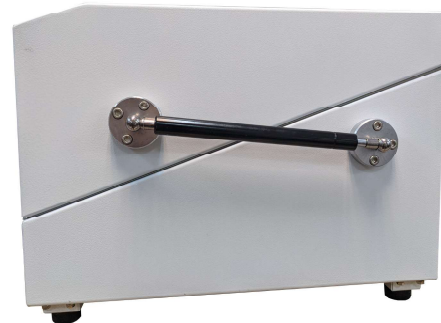

Side View



I/O Module
(Standard Type)



Inside View



RAPIDTEK
RF PRODUCT